

# Electrostatic Discharge Wallcovering

Lonseal Corporation

Available for walls or ceilings in clean room of factory and research facilities.  
Conductive interior finishing materials with advanced dust resistance and airtightness.

# Electrostatic Discharge Wallcovering

**Insulation resistance  $10^8 \Omega$**


## ▪ Specialty

The surface-active agent is used as an antistatic agent, and the wallcovering has an insulation resistance of  $10^8 \Omega$ .

## ▪ Specifications

Thickness	0.24mm
Width	920mm
Length	50m
Number of Colors	4
Packing	50m per roll

## ▪ Structure

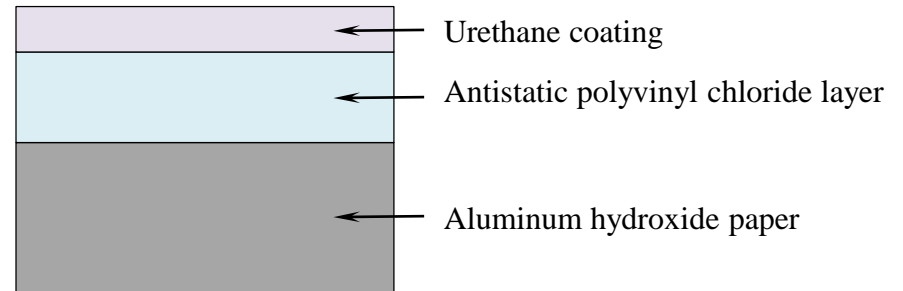

## ▪ Antistatic property

	Typical value	Condition	Test method
Surface specific resistance	$1.7 \times 10^8 \Omega$	20 °C, 60% RH	JIS K 6911
Withstand voltage half-life	0.43 seconds	20 °C, 60% RH	JIS L 1094

Typical values; not to be construed as specification limits.